

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ³ : G02C 7/04	A1	(11) International Publication Number: WO 84/ 04401 (43) International Publication Date: 8 November 1984 (08.11.84)
(21) International Application Number: PCT/EP84/00130 (22) International Filing Date: 3 May 1984 (03.05.84) (31) Priority Application Number: 491,638 (32) Priority Date: 5 May 1983 (05.05.83) (33) Priority Country: US (71) Applicant: SCHERING CORPORATION [US/US]; 2000 Galloping Hill Road, Kenilworth, NJ 07033 (US). (72) Inventors: LOSHAEK, Samuel ; 2219 N. Orchard, Chicago, IL 60614 (US). TOWNSLEY, Malcolm, George ; 424 Grand Boulevard, Park Ridge, IL 60068 (US). (74) Agents: ANTONY, Fritz et al.; Technobiotic Ltd., P.O. Box 601, CH-6002 Lucerne (CH).	(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), FR (European patent), GB (European patent), JP, LU (European patent), NL (European patent), SE (European patent). Published With international search report.	

(54) Title: HYDROPHILIC BIFOCAL CONTACT LENS

(57) Abstract

Hydrophilic bifocal corneal contact lenses of the alternating-vision type having a critical set of dimensions for the various elements which results in a surprising increase in the success rate of persons wearing these improved lenses.

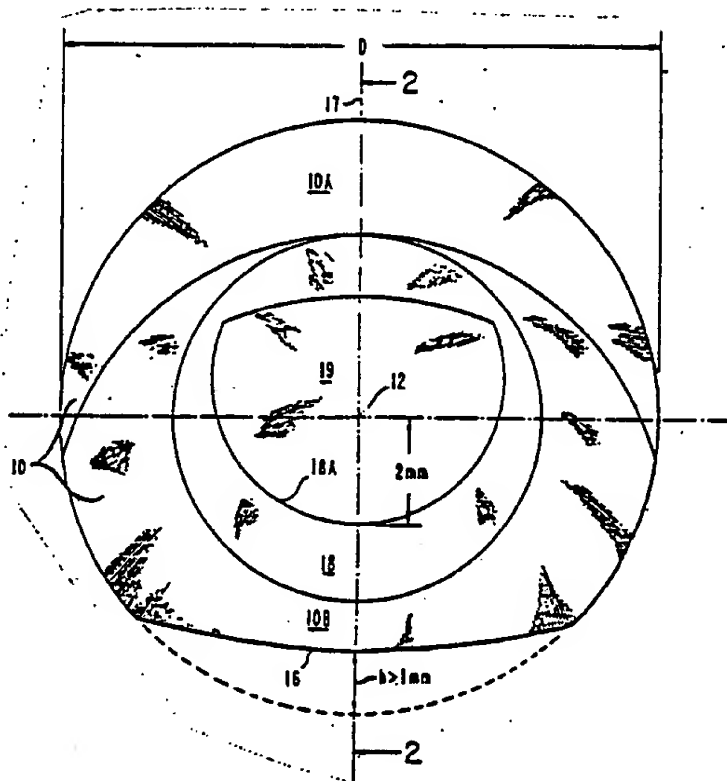

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	KR	Republic of Korea
AU	Australia	LI	Liechtenstein
BE	Belgium	LR	Sri Lanka
BG	Bulgaria	LU	Luxembourg
BR	Brazil	MC	Monaco
CF	Central African Republic	MG	Madagascar
CG	Congo	MR	Mauritania
CH	Switzerland	MW	Malawi
CM	Cameroon	NL	Netherlands
DE	Germany, Federal Republic of	NO	Norway
DK	Denmark	RO	Romania
FI	Finland	SD	Sudan
FR	France	SE	Sweden
GA	Gabon	SN	Senegal
GB	United Kingdom	SU	Soviet Union
HU	Hungary	TD	Chad
JP	Japan	TG	Togo
KP	Democratic People's Republic of Korea	US	United States of America

HYDROPHILIC BIFOCAL CONTACT LENS

The present invention provides a bifocal corneal contact lens that may be worn successfully by a much higher percentage of patients than those of the prior art.

- 5 As a person ages, his ability to vary the focusing power of the natural lens of the eye diminishes. In the optical profession this is termed a loss of accommodation. At about age 40 the loss of accommodation commonly reaches a point where a refractive correction
- 10 for reading or other near-vision work is required. If the person also requires a refractive correction for distant vision, then two different corrections are required. For patients wearing spectacles, bifocal lenses are provided wherein the distant-vision
- 15 correction is built into the top portion of each spectacle lens and the reading correction, having higher plus power than the distant-vision correction, is built in to the lower portion. To gaze at objects in the



- 2 -

distance, the patient looks straight-ahead with respect to his face, through the distant-vision portion of the lenses. To see objects that are close, the patient looks downward through the reading portion of the lenses.

5 Bifocal spectacles based on this alternating-vision principle have been in successful use for many years.

Prior-art bifocal contact lenses have not been very successful. Contact lens bifocals made of hard material are difficult to make. Moreover, it is difficult to

10 control the lens position, i.e. the patient cannot switch from looking through the reading segment to the distant-vision segment at will, and vice-versa. Some prior art bifocal contact lenses made of hydrophilic material are based on a concentric design which

15 attempts, rather unsuccessfully, to provide simultaneous distance and near-vision. In the one known commercial hydrophilic bifocal design based on the alternating-vision principle, the patient encounters great difficulty controlling the position of the lens

20 with respect to his pupil, resulting in blurred vision.

This invention relates to hydrophilic bifocal corneal contact lenses of the alternating-vision type having a critical set of dimensions for the various elements which results in a surprising increase in the success

25 rate of persons wearing these improved lenses.

The invention is a hydrophilic bifocal corneal contact lens comprising a concave rear surface and a convex front surface, said lens in frontal projection comprising:



- 3 -

- (a) a perimeter in the form of a truncated circle having a diameter of 14 to 15 mm, said truncation forming the bottom of said lens and having a height greater than 1 mm,
- 5 (b) a reading segment above the truncation having an upper boundary below the centre of said truncated circle, the distance from said centre to said upper boundary along a line bisecting the lens being from 1.5 to 3.5 mm, and
- 10 (c) a distant-vision segment located such that the centre of said truncated circle is within said distant-vision segment;

whereby when said lens is worn by a patient the distant-vision segment covers at least 70 percent of the
15 patient's pupil when the patient looks straight ahead.

The present invention involves the discovery of a critical set of dimensions for alternating-vision bifocal contact lenses. Our lens yields the following visual results for a high percentage of patients fitted:

- 20 1) When the patient looks straight ahead, the distance portion of the lens moves into a position such that at least 70% and often 90%-100% of the pupil is covered by the distance portion, and
- 2) When the patient looks down, the lens translates
25 upwards with respect to the pupil so that the axis of vision is through the reading segment. These two conditions are met in the lens of this invention and the



wearer is able to translate from distance to near vision at will.

One critical dimension for the subject lens is that the diameter be at least 14 mm and preferably about 14.5 mm. It has unexpectedly been found that this is a key determinant in the ability to control translation of the lens on the eye in order to alternate from far to near vision. Attempts to improve translation control by changing the base curve radius in order to tighten or loosen the lens were not successful. It was surprising to find that the larger diameter was so critical, especially since the larger diameter produces a tighter fitting lens which would have been expected to more or less immobilize movement of the lens. When, for example, a 13.5 mm diameter lens was tried with optimal fitting, good translation control was not obtained on a much larger percentage of patients than with a 14.5 mm diameter lens.

Another advantage of the critical set of dimensions, and particularly the diameter, is that the lens can be made thinner without loss of translation control. Thus, for example, a 13.5 mm diameter lens having centre thicknesses as low as those shown in Table I, gave uncontrolled lens translation, in many persons even when the lens was otherwise optimally fitted.

Figure 1 is a front view of a hydrophilic bifocal corneal lens in accordance with the invention.

Figure 2 is a sectional view of the lens of figure 1 taken along section 2-2.



Figure 1 represents a frontal projection of the lens onto a plane, i.e., an orthographic projection. All dimensions shown in figure 1 are measured in the plane of the frontal projection. All dimensions shown in the drawings and described in the specification and claims are achieved after the hydrophilic lens is hydrated.

Figures 1 and 2 show the preferred embodiment of the inventive bifocal contact lens. The inventive lens, which is constructed of hydrophilic material, has a concave rear surface 20 intended to contact the patients eye and a generally convex front surface 21. In frontal projection (figure 1) the lens has a perimenter in the form of a truncated circle, i.e. a circle from which a portion has been cut away. In figure 1 the dotted line at the bottom represents the portion of the original, untruncated circle cut away. As used throughout the specification and claims, the centre of the truncated circle is the same as the centre of the circle before truncation. The truncated circle has a diameter D between 14 and 15 mm, preferably 14.5 mm. Any diameter passing through centre 12 of the truncated circle will have diameter D of from 14 to 15 mm, unless the diameter passes through the truncation 16, in which case the diameter will be less than D.

Truncation 16 forms the bottom of the lens and has a height h of greater than 1 mm, preferably at least 1.25 mm, and most preferably 1.5 mm. The height h of the truncation is the distance from the outer perimeter of the untruncated circle, shown dotted in figure 1 to the bottom of the lens measured along a line 17



- 6 -

vertically bisecting the lens. Preferably the truncation is slightly curved, as shown in figure 1, but a straight truncation is acceptable as long as the height of the truncation, i.e. the distance from the edge of the original untruncated circle to the bottom mid-point of the lens is at least 1 mm.

A reading segment 18 is located above the truncation. Reading segment 18 has an upper boundary 18A located below the centre 12 of the truncated circle. The distance from centre 12 to upper boundary 18A measured along a line 17 bisecting the lens is from 1.5 to 3.5 mm, preferably between 2 mm and 2.5 mm, and more preferably 2 mm as shown in figure 1.

A distant-vision segment 19 is located such that centre 12 is within distant-vision segment 19. In figure 1 the prescription for reading segment 18 completely surrounds distant-vision segment 19, however this is not necessarily true for all cases, depending on the prescriptions of the two segments. Of course, any part of the reading segment prescription located above the distant-vision segment would not be used. Hence 18A, located below centre 12, is the upper boundary of the usable reading segment.

It is generally desirable to maintain the thickness of the lens as low as possible. The thinner the lens, the greater the transmittance of oxygen from the environment through the lens to the corneal surface.

However, with lenses not having the critical dimensions of the invention, it was not practical to make the



- 7 -

lenses thin because thinness caused the lenses to move excessively. It has been found that by making lenses in accordance with the invention, it is possible to make the lenses thinner and still provide a lens in which the movement is well controlled.

Table I illustrates preferred maximum thickness t of the inventive lens for adds in the power range of 1.25 to 2.50 diopters. Of course, for other prescriptions, correspondingly thin maximum centre thicknesses would be used.

TABLE I, Preferred Maximum Centre Thickness

	Distant-vision Prescription, Diopters	Add to distant-vision prescriptions to achieve reading prescription, diopters	Maximum Thickness t at Centre, mm
15	-4	1.25	0.08
	-2	1.25	0.08
	0	1.25	0.08
20	+2	1.25	0.14
	-4	2.50	0.08
	-2	2.50	0.08
	0	2.50	0.10
	+2	2.50	0.15
25	+6	2.50	0.24



- 8 -

The inventive lens has an optional outer carrier 10 having a thin upper portion 10A and a thicker lower portion 10B. Extra thickness at the bottom helps to prevent rotation of the lens within the eye.

- 5 Bifocal lenses of the present invention may be made from any of the hydrophilic polymers useful for making soft contact lenses, such as polymers made by polymerizing hydroxyethyl methacrylate, vinyl pyrrolidone, and other hydrophilic monomers in the presence of
- 10 suitable initiators and optional cross-linking agents. A particularly useful hydrophilic polymer for making lenses in accordance with the present invention contains a major amount of hydroxyethyl methacrylate and a minor amount of ethoxyethyl methacrylate and is
- 15 described in U.S. Patent No. 4,028,295. Minor amounts of methacrylic acid added to the mixture of monomers disclosed therein also provide a useful polymer. Lenses in accordance with the invention may be made by cutting the polymer in its unhydrated state in a
- 20 manner well known in the art. For example, the lenses may be based on the "no jump" principle described by Mandell in the Optometric Weekly, June 1, 1967, pages 19 to 21.



EXAMPLE 1

Several patients are fitted with lenses in accordance with the present invention having the following dimensions:

5	Diameter D:	14.5 mm
	Distance from centre of lens to top of reading segment along a line bisecting the lens:	1.5 mm
	Height of truncation, h:	1 mm
10	Inner diameter of carrier:	9 mm

Fitters report that the lens centres more readily and rotates less than alternating-vision soft bifocals of the prior art. Patients report that the lenses of this example are more comfortable and cause less tearing than the prior-art alternating-vision bifocal.

EXAMPLE 2

Several patients are fitted with lenses in accordance with the present invention having the following dimensions:

20	Diameter D:	14.5 mm
	Distance from centre of lens to top of reading segment along a line bisecting lens:	2.5 mm
	Truncation height:	1.5 mm



- 10 -

Inner Diameter of carrier: 9 mm
Thickness t of lens: In accordance
with Table I.

5 Two studies were performed with the following
results:

	<u>Study # 1</u>	<u>Study # 2</u>
Percent of patients having at least 75% of the pupil in the distant-vision segment 10 when looking straight ahead	84%	96%
Percentage of patients having 100% of the pupil in the distant-vision segment when looking 15 straight ahead:	72%	72%

These results project a high long-term success rate
for patients fitted with the inventive lenses.



- 11 -

C L A I M S

1. A hydrophilic bifocal corneal contact lens comprising a concave rear surface and a convex front surface, said lens in frontal projection comprising:

- 5 (a) a perimeter in the form of a truncated circle having a diameter of 14 to 15 mm, said truncation forming the bottom of said lens and having a height greater than 1 mm,
- 10 (b) a reading segment above the truncation having an upper boundary below the centre of said truncated circle, the distance from said centre to said upper boundary along a line bisecting the lens being
- 15 from 1.5 to 3.5 mm, and
- (c) a distant-vision segment located such that the centre of said truncated circle is within said distant-vision segment;

20 whereby when said lens is worn by a patient the distant-vision segment covers at least 70 percent of the patient's pupil when the patient looks straight ahead.

2. The lens of claim 1 wherein the height of said truncation is at least 1.25 mm.

3. The lens of claim 2 wherein the height of

25 said truncation is about 1.5 mm.



4. The lens of any one of claims 1 to 3 wherein the distance from the centre of said truncated circle to the upper boundary of said reading segment is between 2 and 2.5 mm.
- 5 5. The lens of claim 4 wherein the distance from the centre of said truncated circle to the upper boundary of said reading segment is 2 mm.
6. The lens of any one of claims 1 to 5 wherein the diameter of said truncated circle is 14.5 mm.
- 10 7. The lens of any one of claims 1 to 6 wherein the height of the truncation is at least 1.25 mm, the diameter of said truncated circle is 14.5 mm, and the distance from the centre of said truncated circle to the upper boundary of said reading segment is between
15 2 and 2.5 mm.
8. The lens of claim 7 wherein the height of the truncation is 1.5 mm, and the distance from the centre of said truncated circle to the upper boundary of said reading segment is 2 mm.
- 20 9. The lens of any one of claims 1 to 8 wherein the prescriptions and maximum thickness at the centre of said truncated circle are in accordance with Table I.



FIG. 1


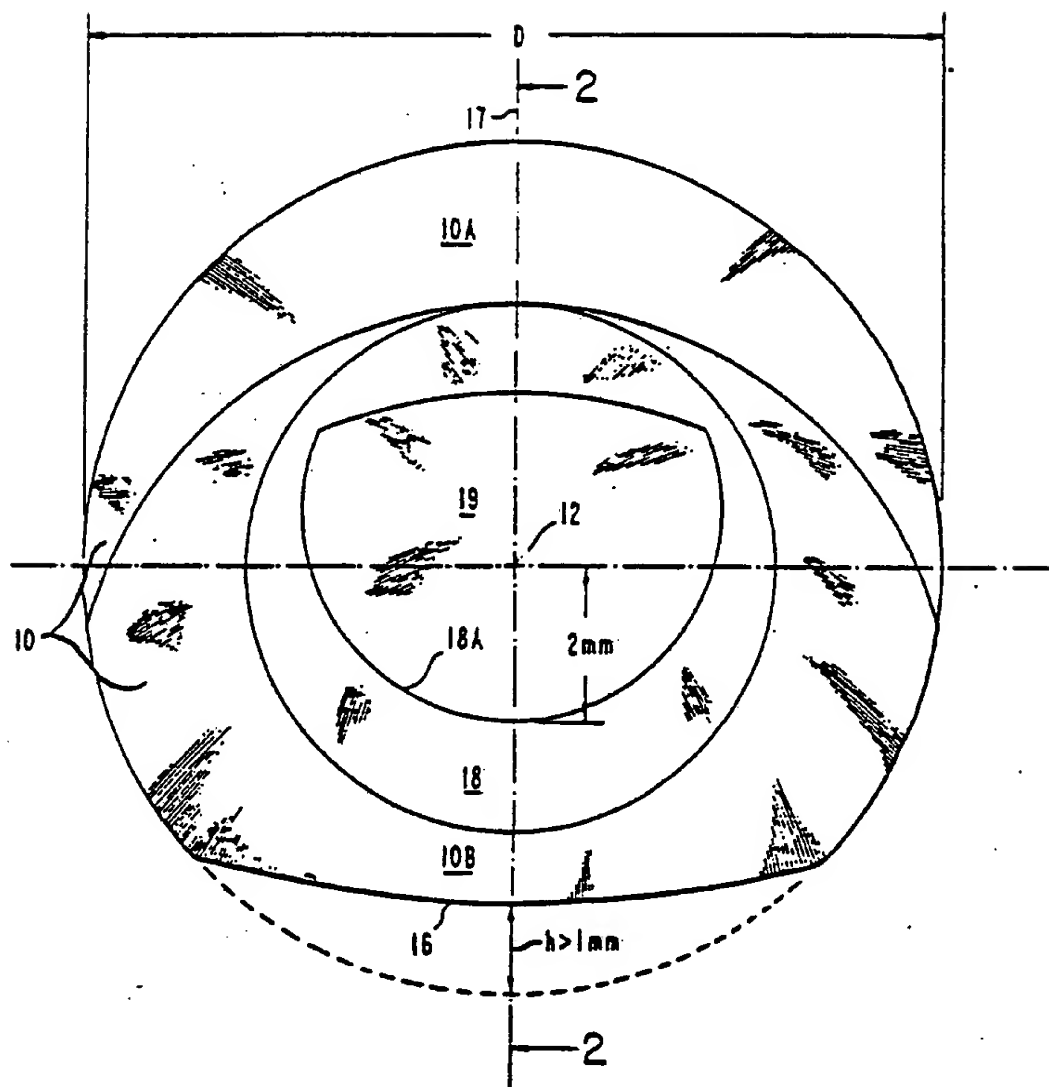



FIG. 2

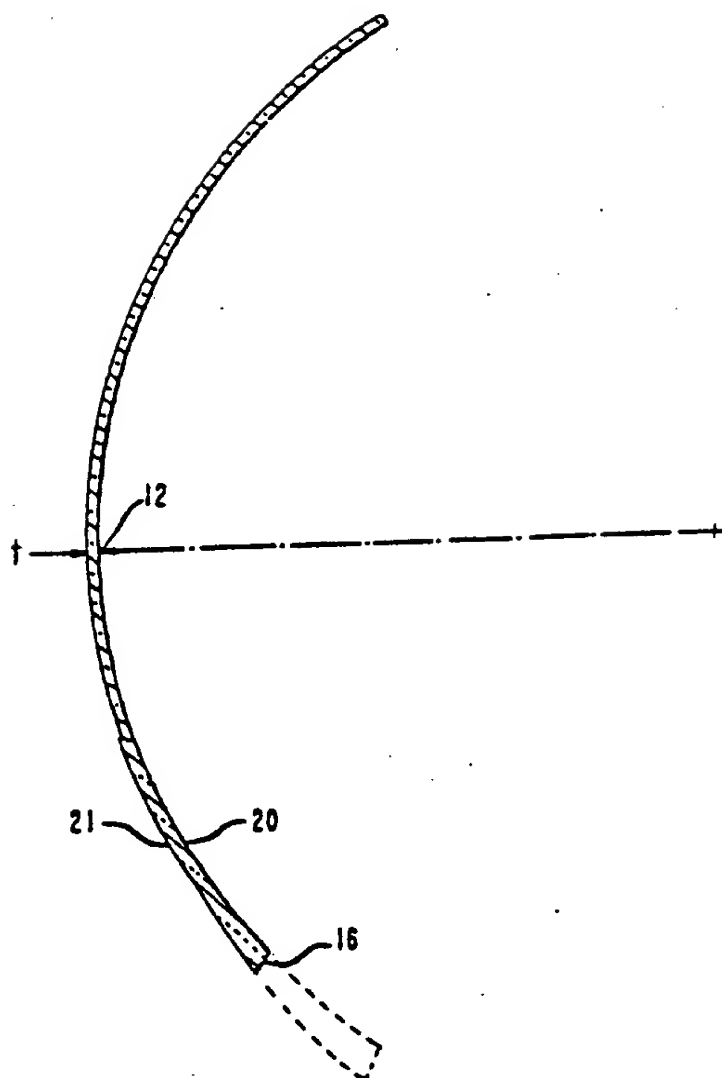

INTERNATIONAL SEARCH REPORT

International Application No PCT/EP 84/00130

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) * According to International Patent Classification (IPC) or to both National Classification and IPC IPC ³ : G 02 C 7/04						
II. FIELDS SEARCHED <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Minimum Documentation Searched *</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 25%; border: 1px solid black;">Classification System</th> <th style="border: 1px solid black;">Classification Symbols</th> </tr> <tr> <td style="border: 1px solid black; text-align: center; vertical-align: middle;">IPC³</td> <td style="border: 1px solid black; text-align: center; vertical-align: middle;">G 02 C</td> </tr> </table> <div style="text-align: center; border-top: 1px solid black; border-bottom: 1px solid black;">Documentation Searched other than Minimum Documentation to the extent that such Documents are included in the Fields Searched *</div>			Classification System	Classification Symbols	IPC ³	G 02 C
Classification System	Classification Symbols					
IPC ³	G 02 C					
III. DOCUMENTS CONSIDERED TO BE RELEVANT 14						
Category *	Citation of Document, 16 with indication, where appropriate, of the relevant passages 17	Relevant to Claim No. 18				
Y	GB, A, 2033101 (MADDEN CONTACT LENSES) 14 May 1980 see the entire document ---	1-8				
Y	DE, A, 3003985 (HECHT CONTACT LINSEN) 13 August 1981 see page 5, lines 13-15; page 6, lines 8-12 ---	1-8				
A	DE, B, 1199019 (R.J.A. KOCH) 19 August 1965 see page 3, lines 40-50 -----	1,4,5,8				
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categories of cited documents: 18</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"Z" document member of the same patent family</p> </div> </div>						
IV. CERTIFICATION						
Date of the Actual Completion of the International Search * <div style="text-align: center; font-weight: bold;">24th July 1984</div>		Date of Mailing of this International Search Report * <div style="text-align: center; font-weight: bold;">13 AOUT 1984</div>				
International Searching Authority * <div style="text-align: center; font-weight: bold;">EUROPEAN PATENT OFFICE</div>		Signature of Authorized Officer 19 <div style="text-align: center;">  G.L.M. Kruidenberg </div>				

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON

INTERNATIONAL APPLICATION NO.

PCT/EP 84/00130 (SA 7067)

This Annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 07/08/84

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A- 2033101	14/05/80	None	
DE-A- 3003985	13/08/81	None	
DE-B- 1199019		None	

For more details about this annex :
see Official Journal of the European Patent Office, No. 12/82